


OB-Van 14

FlexIPVan 4K-UltraHD
HDR - HFR - WCG

[< BACK](#)

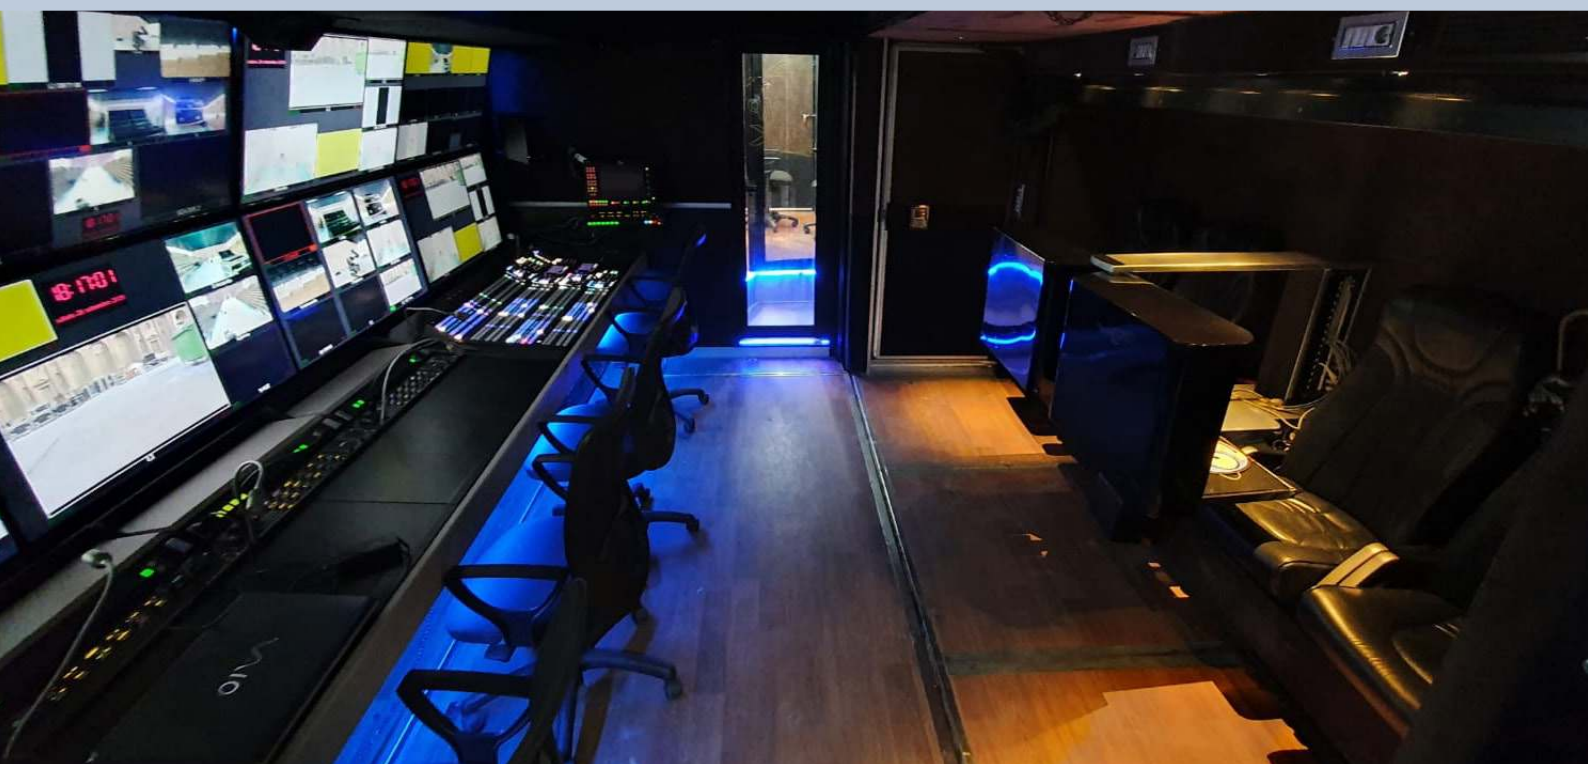

OB-Van 14 CONFIGURATION

MECHANICAL SECTION

MODEL: MAN TGX 18.480

TRACTOR UNIT PLATE: AF49622

TRACTOR UNIT DIMENSIONS: Length 5.875 mt - Width 2.50 mt - Height 4 mt

PLATE TRAILER UNIT: AF49622

TRAILER UNIT DIMENSIONS: Length 13.60 mt (14.70 mt with ext.) - Width 2.55 mt (5.50 mt with ext.) - Height 4 mt

ELECTRICAL SYSTEM: 380V

CONSUMPTION: 50 KW

INPUT: 125A 5-pole

VOLTAGE: stabiliser

DOUBLE INSULATION TRANSFORMER

TECHNICAL SECTION

UP TO 36 CAMERAS HD-3G OR 4K/UHD HDR - HFR - WCG (SONY HDC-4300 OR PMW-F55)

ONLY 4K LARGE SMALL B4 OR PL MOUNT LENSES (Canon UHD DIGISUPER UJ86X93B 9.3-800MM 1:1.7 - UJ90X9B

9-810MM 1:2.4. - CJ20EX 7.8B 7.8-156MM 1:1.8 - CJ12EX 4.3B 4.3-52MM 1:1.8)

UP TO 10 EVS 4K AND SERVER SONY PVW4400 NET CONNECTED

VIDEO SWITCHER SAM KAHUNA 9600 6MES - UP TO 3 MAVERICK CONSOLES - AND SAM KAHUNA 6400

1024 X 1024 IP-ROUTER

IP ROUTING SMPTE 2022-7 /REDUNDANCY AND UNCOMPRESSED) SAM TECHNOLOGY BASED

SONY OLED HDR / TV-LOGIC / EIZO QUALITY / REFERENCE 4K-UHD MONITORS

GV KALEIDO MULTIVIEWERS

HDR PROCESSORS TO-FROM SONY S-LOG3 / HDR10 / HLG / REC-709

STANDARD-FORMAT-FREQUENCY PROCESSOR TO-FROM 25P - 50I - 30P - 50P - 60P / LEVEL A - LEVEL B - QUAD - 2SI etc. / 3G - 6G - 12G

FLEXIPVAN ARCHITECTURE

AUDIO MIXER CONSOLE STAGETEC CRESCENDO

AUDIO ROUTING BASED ON STAGETEC NEXUS

DOLBY E - AC3

CLEARCOM ECLIPSE HX MEDIAN INTERCOM WITH IP TECHNOLOGY

MULTI INPUT WAVEFORM MONITORS LEADER LV5490

6 WORKING ROOMS ON OB-VAN WITH EXCLUSIVE ACCESS DOORS

26 FULL OPERATIVE DESK POSITIONS ON OB-VAN

33 + 33 KWATT PARALLEL UPS SYSTEM

FLOORPLAN

